

Flood mitigation performance of low impact development technologies under different storms for retrofitting an urbanized area

Article

Accepted Version

Creative Commons: Attribution-Noncommercial-No Derivative Works 4.0

Hu, M., Zhang, X., Li, Y., Yang, H. ORCID:
<https://orcid.org/0000-0001-9940-8273> and Tanaka, K. (2019)
Flood mitigation performance of low impact development
technologies under different storms for retrofitting an
urbanized area. *Journal of Cleaner Production*, 222. pp. 373-
380. ISSN 0959-6526 doi:
<https://doi.org/10.1016/j.jclepro.2019.03.044> Available at
<https://centaur.reading.ac.uk/82802/>

It is advisable to refer to the publisher's version if you intend to cite from the work. See [Guidance on citing](#).

To link to this article DOI: <http://dx.doi.org/10.1016/j.jclepro.2019.03.044>

Publisher: Elsevier

All outputs in CentAUR are protected by Intellectual Property Rights law, including copyright law. Copyright and IPR is retained by the creators or other copyright holders. Terms and conditions for use of this material are defined in the [End User Agreement](#).

www.reading.ac.uk/centaur

CentAUR

Central Archive at the University of Reading

Reading's research outputs online

Flood mitigation performance of low impact development technologies under different storms for retrofitting an urbanized area

Maochuan Hu^{1*}, Xingqi Zhang^{2*}, Yu Li³, Hong Yang^{2,4,5} and Kenji Tanka¹

1 Disaster Prevention Research Institute, Kyoto University, Uji, Kyoto 611-0011, Japan

2 School of Geography and Ocean Sciences, Nanjing University, Nanjing 210023, China

3 Graduate School of Engineering, Kyoto University, Kyoto 615-8530, Japan

4 Collaborative Innovation Center of Atmospheric Environment and Equipment Technology, Jiangsu Key Laboratory of Atmospheric Environment Monitoring and Pollution Control, School of Environmental Science and Engineering (AEMPC), Nanjing University of Information Science & Technology, 219 Ningliu Road, Nanjing 210044, China

5 Department of Geography and Environmental Science, University of Reading, Reading RG6 6AB, UK

* Corresponding author: maochuanhu@gmail.com; zxqrh@nju.edu.cn

Abstract: Low impact development technologies (LIDs) have been reported as alternatives to mitigate urban water-related hazards, particularly for urban flooding. However, the effectiveness of LIDs on flood mitigation is still not well understood. This study assessed the mitigation extent of urban flooding by LIDs for retrofitting an urbanized area at a feasible level using a hydrological model. A range of storms with different rainfall durations and amounts from intensity-duration-frequency curves were used to evaluate the hydrological performances of LIDs. The results indicated that LIDs were effective alternatives to mitigate urban flooding in the urbanized area. Surface runoff and peak flow decreased by 18.6-59.2% and 8-71.4%, respectively. However, the flood mitigation performance decreased markedly with the increase of rainfall amount. Although LIDs were less effective in flood mitigation during shorter and heavier storms, the performance was better with the increase of rainfall duration. This research provides an insight into flood reduction capabilities of LIDs under different rainfall characteristics for retrofitting built up areas, which is useful for urban storm management.

Keyword: Rainwater harvesting; Permeable pavements; Vegetated swales; Rainfall duration and intensity; Sponge city; IDF curve

1. Introduction

Urban flood risks have been increasing due to rapid urbanization and climate change in many cities around the world (Abebe et al., 2018), such as Minneapolis in the U.S.A. (Hettiarachchi et al., 2018) and Nanjing in China (Du et al., 2012). And this trend is very likely to continue or accelerate in the near future though uncertainty remains regarding future climate precipitation (IPCC, 2013). Traditional urban rainwater management practices are designed to meet performance standards (Pyke et al., 2011) and have exhibited the ineffectiveness in some extreme events such as the Tohoku tsunami in 2011 (Hu et al., 2017a). Meanwhile, some alternative approaches that control storm water at the source have become popular in the use of terms such as low impact development (USEPA, 2000; Xu et al., 2017; Wang et al., 2018) and best management practices (Ice, 2004; Fletcher et al., 2015; Petit-Boix et al., 2017).

The most commonly adopted low impact development technologies (LIDs) include rain cisterns, permeable pavements (PP), vegetated swales (VS), green roof and bio-retention (Ahiablame and Shakya, 2016). The technologies of rain cisterns, PP and VS were applied in this study. The benefits of these technologies on flood mitigation have been substantially documented in scientific literature (Damodaram et al., 2010 and Gao et al., 2013), e.g. reduction in peak flow (Palanisamy and Chui, 2015), runoff (Baek et al., 2015), flood volume (Mei et al., 2018), inundation area (Hu et al., 2017b) and others. Palla and Gnecco (2015) found that the combinations of PP and green roof could reduce 23% of runoff and 45% of peak flow. Ahiablame and Shakya (2016) reported that flood flow events were maximally reduced by 40% with the implementation of rain barrel, rain garden and PP in an urban watershed in central Illinois. In China, Xie et al. (2017) found that PP could reduce 24.7% of peak flow in a designed five-year storm in a tourist village in Jurong, east China. Meanwhile, some studies indicated that the performances of these technologies on flood control were significantly different in various storms (Lee et al., 2012 and Qin et al., 2013). For example, the lag times to peak of LIDs were significantly larger than the traditional watershed for small storms in Southeastern Connecticut (Hood et al., 2007). Wang et al. (2016) reported that the hydrological performances

of bio-retention on peak runoff reduction were different in 2-year and 10-year designed storms in Singapore. Surface runoff was reduced by 15%, 27% and 38% for 2, 5 and 10-year storms with the application of rain gardens in Columbia (Morsy et al., 2016).

Although it is widely recognized that runoff volume and peak flow are reduced by LIDs, their flood control capabilities are not well understood in urbanized watersheds. Few studies (Pickerill and Maxey, 2009) concern the available space for implementation of LIDs in urbanized areas. Implementation area assumption was typically used in the earlier studies on flood mitigation of LIDs (Luan et al., 2017; Ahiablame et al., 2013). In fact, the retrofitting spaces are restricted in built-up areas due to the limitation of land, resident orientation, and complex urban environment (Talen, 2011). It is of significance to know which level of retrofitting technologies could be implemented in urbanized areas. Under the available level, is it effective on flood mitigation? And what are the mitigation extents of urban flooding under different storms? In addition, China proposed a sponge city construction plan in 2014, attempting to find ecologically suitable alternatives to mitigate water-related problems such as urban floods (MHURD, 2014). LIDs are an important component of sponge city construction. The sponge city plan is still at the infant implementing stage in 30 pilot cities of China. It requires more studies on LIDs and urban hydrology in various cities with different rainfall characteristics.

The main objectives of this study are to 1) evaluate the performance of LIDs on flood mitigation at an investigated feasible implementation level for retrofitting an urbanized area; 2) investigate flood mitigation performance under designed storms with different rainfall durations and frequencies from the intensity-duration-frequency (IDF) curve of the study area. The results provide important implications for understanding the hydrological performance of LIDs for retrofitting an urbanized watershed. This study will be helpful for urban storm management and Chinese sponge city construction.

2. Method

2.1 Study area

The study area is located at Hexi district in Nanjing, east China (Fig. 1). The choice of this study area was driven by severe waterlogging problems. Hexi district is surrounded by the Qinhuai River and the Yangtze River. During the rainy season, water levels in both rivers are higher than the Hexi district's average height of terrain, so it is difficult to discharge surface runoff into the rivers, with the consequence of serious waterlogging. The study area is one of the areas with high vulnerability to waterlogging in Nanjing (Zhang et al., 2012). The distribution of land uses is shown in Table 1. The total area is 0.58 km², with around 73.8% impervious underlying surfaces.

Table 1

Land use and land cover in the study area

Type	Roof	Non-busy road and squares	Busy road	Green land	Water	Total
Area (km ²)	0.153	0.131	0.143	0.150	0.001	0.578
Percentage (%)	26.4	22.7	24.7	26.0	0.2	100

2.2 Modeling approach overview

A model proposed by Hu et al. (2018) was used to evaluate the effectiveness of LIDs on flood mitigation. The model details and setup were reported in the previous study (Hu et al., 2018). Brief summary is provided here. The model consists of impervious module with the soil conservation service (SCS) curve number (CN) method, and pervious module with Horton's infiltration method (Horton, 1941). The SCS-CN method, empirically developed for runoff evaluation (Mishra and Singh, 2013), has been widely applied in low impact development related studies with acceptable performance (Ahiablame et al., 2012; Zhang et al., 2016).

It estimates runoff (RF , mm) for a given precipitation depth (P , mm) as:

$$RF = \frac{(P - I)^2}{P - I + S} \quad P > I \quad (1)$$

$$S = \frac{25400}{CN} - 254 \quad (2)$$

where S is soil moisture retention; I is the initial abstraction (i.e. infiltration, interception and surface storage),

equals to $0.2S$. The value of CN is set as 94 according to a published study (Zhang et al., 2016). A description of the development of pervious module based on Horton's infiltration model is provided by Hu et al. (2018).

It estimates surface runoff (R_s) for given precipitation duration (x) and intensity (q) as:

$$R_s = \int_0^x h_s dx \quad (3)$$

$$h_s = \begin{cases} 0 & , q \leq f_0 \left(1 - \frac{W(t)k}{f_0}\right) + f_c \frac{W(t)k}{f_0} \\ q - f_0 \left(1 - \frac{W(t)k}{f_0}\right) - f_c \frac{W(t)k}{f_0} & , q > f_0 \left(1 - \frac{W(t)k}{f_0}\right) + f_c \frac{W(t)k}{f_0} \end{cases} \quad (4)$$

$$W(t) = \int_0^t f_0 e^{-kt} dt \quad (5)$$

where f_c and f_0 are the minimum and maximum infiltration; $W(t)$ is soil moisture at time t ; k is a decay constant. The values of f_c , f_0 and k are 12 mm/h, 199.8 mm/h and 1.98, respectively (Table 2). Initial soil moisture is set as half of maximum soil water capacity for all designed rainfall events (Hu et al., 2018; Gao, 2010).



Fig. 1. Location and land use map of the study area in Nanjing, China

2.3 Designed rainstorms

Various types of rainstorms were designed according to the empirical formula of rainfall IDF relationship in Nanjing, which was developed by the Nanjing Meteorological Bureau. The formula has been widely used in Nanjing city where the study area located at (Rui et al., 2015; Shi et al., 2017). It is described as:

$$q = \frac{64.3 + 53.8 \lg T}{(r + 32.9)^{1.011}} \quad (6)$$

where q is rainfall intensity (mm/min); T is return period, and r is rainfall duration (min). Chicago hyetograph method (Keifer and Chu, 1957) was used for rainstorm design (Qin et al., 2013). The ratio of time to peak point r was set as 0.4 (Jia et al., 2014; Silveira, 2016). Four return periods (2-, 10-, 50- and 100-year) and three rainfall durations (2- 4- and 6-hour) were considered. Storms are named as mhTn, where m and n are numbers of duration time and return periods. For example, 2hT2 is the storm of 2 hour duration

and 2 year return period. The rainfall amounts of all designed storm events are shown in Table 3 and the distribution of rainfall intensities are shown in Fig. 2.

Table 2

Mandatory parameters values for model simulation

	Impervious surfaces	Green lands	PP	VS
f_0 (mm h ⁻¹)	-	199.8	15000	199.8
k	-	1.98	104.17	1.98
f_c (mm h ⁻¹)	-	12	-	12
CN	94	-	-	-

PP: permeable pavements; f_0 : maximum infiltration; k : a decay constant; VS: vegetated swales; f_c : minimum infiltration; CN : curve number

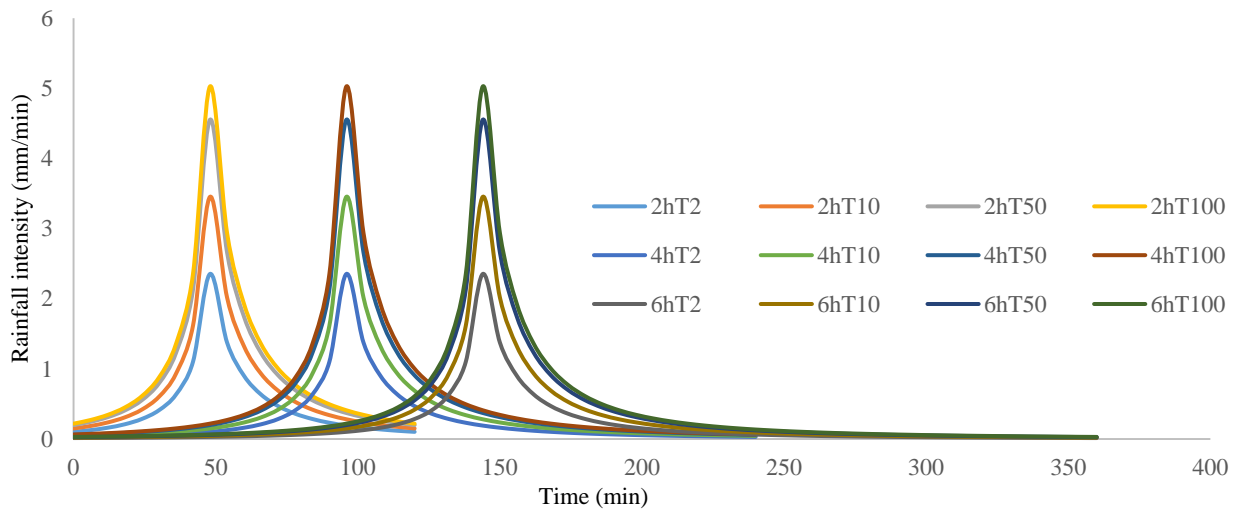


Fig. 2. Intensity patterns of designed rainstorms

2.4 Implementation level of low impact development technologies

2.4.1 Rooftop rainwater harvesting

The potentials of rooftop rainwater harvesting are limited by tank capacity and available land space for tank setting. In this study, the tank capacity was calculated by specified rainstorm. The capacity equals to the rooftop surface runoff during the specified rainfall events. All rooftop runoff is collected into rainfall tanks when rainfall amount is less than the tank capacity. A designed rainfall intensity with 2-year return period

and 2-h durations was used. The tank capacity is 0.044 m^3 (hereafter mentioned as 44 mm) per unit roof area (1 m^2). The reasonability of the selected rainfall intensity is discussed in “Rainwater tank capacity”. In addition, an *in situ* investigation on available land space for rainwater tank set-up was conducted and the results indicated that there were 55% of rooftops available for rainwater harvesting with aboveground cisterns in or around buildings (Zhang et al., 2012). The total implementation area of rooftops for rainwater harvesting is 0.08 km^2 . Four criteria were considered in this investigation, including available places on plazas or parks without impact on facilities usage, on greenbelts without impact on the function and view, outside the construction site in the building area, and in the construction sites (Zhang et al., 2012).

2.4.2 Permeable pavements and vegetated swales

Replacement of existing impervious pavements is a large project and it affects traffic and daily life. Thus, in this study, PP are planned to be implemented on non-busy roads and parking lots. Non-busy roads are community internal roads and city branch roads with low traffic. The total retrofitting area of PP is 0.13 km^2 . Various kinds of PP have different hydrological performance (Fassman and Blackbourn, 2010; Collins et al., 2008). Permeable concretes are used in this study, which have the best performance on flood mitigation compared with other types (Hu et al., 2018). According to previous studies (Hu et al., 2018; Kumar et al., 2016), the parameter values for permeable concretes are shown in Table 2. Also, VS are planned to be built on concentrated green lands except greenbelts between dwelling areas and roads. The total area is about 0.02 km^2 . The height of swales is 10 mm lower than the surrounding ground surfaces. VS have same infiltration rates and soil moisture as green lands in this study, and the mandatory parameters are shown in Table 2.

3. Results

3.1 Performance of low impact development technologies on flood mitigation

Table 3 shows the simulated surface runoff and peak flow (in depth, mm) of original case and LIDs under different designed rainfall events. It was found that LIDs could reduce 19.3-59.2% of surface runoff and

8-71.4% of peak flow in the 2h storms. There was an 18.6-55.2% decrease in surface runoff and a 13.5-72% decrease in peak flow in the 4h storms. Surface runoff and peak flow reduced by 20.8-56.7% and 20.2-71.7% in the 6h storms, respectively. With the exception of the 6hT10 storm, there was no time delay of peak flow observed in all events (Fig. 3).

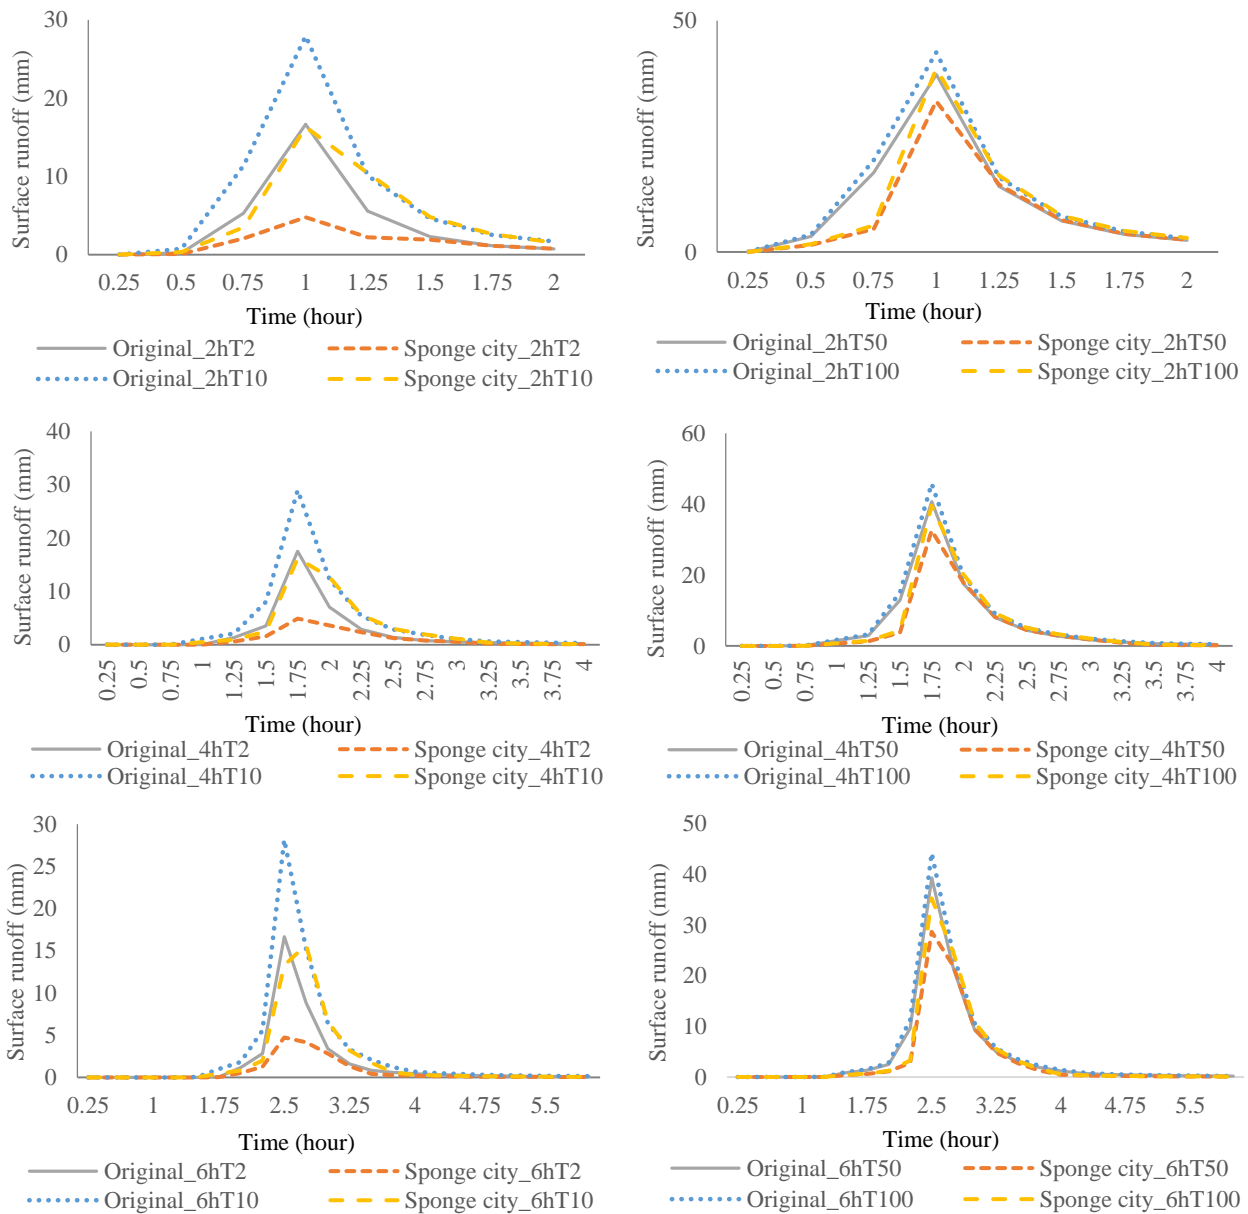


Fig. 3. Simulated surface runoff of original case and LIDs applied under the rainstorms with different return periods and durations

Table 3

Reduction in surface runoff and peak flow with the application of LIDs under different storms

	Rainfall (mm)	Depth of surface runoff (mm)		Runoff reduction		Peak flow reduction	
		Original Case	LIDs	(mm)	%	(mm)	%
2hT2	59.8	31.9	13.0	18.9	59.2	11.9	71.4
2hT10	87.7	59.0	39.5	19.5	33.1	11.6	41.6
2hT50	115.6	86.0	67.0	19.0	22.1	5.8	15.0
2hT100	127.7	97.8	78.9	18.9	19.3	3.5	8.0
4hT2	66.6	36.2	16.2	20.0	55.2	12.6	72.0
4hT10	97.6	65.4	45.3	20.1	30.6	12.8	44.1
4hT50	128.7	95.2	75.1	20.1	21.1	8.2	20.0
4hT100	142.1	108.2	88.1	20.1	18.6	6.2	13.5
6hT2	69.1	37.9	16.4	21.5	56.7	12.0	71.7
6hT10	101.3	67.8	45.6	22.2	32.7	12.5	44.3
6hT50	133.6	98.4	75.5	22.9	23.3	10.6	27.1
6hT100	147.5	111.7	88.5	23.2	20.8	8.9	20.2

3.2 Impact of rainfall amount on flood mitigation performance of low impact development technologies

In the same rainfall duration, the reduction ratios of surface runoff decreased with the increase of rainfall amount. For instance, the reduction ratio of surface runoff was maximum at the storm of 2hT2, followed by the storm of 2hT10, 2hT50 and 2hT100. Similarly, the reduction ratios of peak flow decreased with the increase of rainfall amount in the same rainfall duration. For instance, the reduction ratio of peak flow was maximum at the 6hT2 storm, followed by the 6hT10, 6hT50, and 6hT100 storms. However, changes in reduction values varied with the changes of rainfall amount in different rainfall duration. For 2-h rainfall events, reduction values of surface runoff increased from the 2-year event to the 10-year event and decreased when rainfall amount was larger than the 10-year rainfall amount. For 4-h and 6-h rainfall events, reduction values of surface runoff slightly increased with the increase of rainfall amount. Reduction values of peak flow decreased with the increase of rainfall amount for 2-h rainfall events. For 4-h and 6-h rainfall events, reduction values of peak flow increased when rainfall amount was lower than the 10-year return period

rainfall amount, but they decreased when rainfall amount was higher than the 10-year return period rainfall amount.

Table 4

Reduction in surface runoff and peak flow with the application of LIDs under the rainstorms with same rainfall amount and different duration

	Depth of surface runoff (mm)		Runoff reduction		Peak flow reduction	
	Original Case	LIDs	(mm)	%	(mm)	%
2hR115.6	86	67.01	18.99	22.08	5.72	14.95
4hR115.6	82.59	62.55	20.04	24.27	10.1	28.25
6hR115.6	81.26	58.81	22.45	27.63	12.9	39.16

3.3 Impact of rainfall duration on flood mitigation performance of low impact development technologies

To evaluate the impact of rainfall duration on flood mitigation, three storms were designed. They had the same rate of time to peak point (0.4) and the rainfall amount (115.6 mm) in different rainfall duration (2, 4 and 6-h) named 2hR115.6, 4hR115.6 and 6hR115.6 (Table 4). With the same rainfall amount, as the rainfall duration increased, both surface runoff and peak flow declined. The reduction ratio of surface runoff was minimum (22.08%) at the 2hR115.6 storm, followed by the 4hR115.6 and 6hR115.6 storms. Similarly, the reduction ratio of peak flow increased from 14.95% to 39.16%. When rainfall duration was longer, the performance of LIDs on flood mitigation was better. In addition, there was no time delay of peak flow with the increase of rainfall duration (Fig. 4).

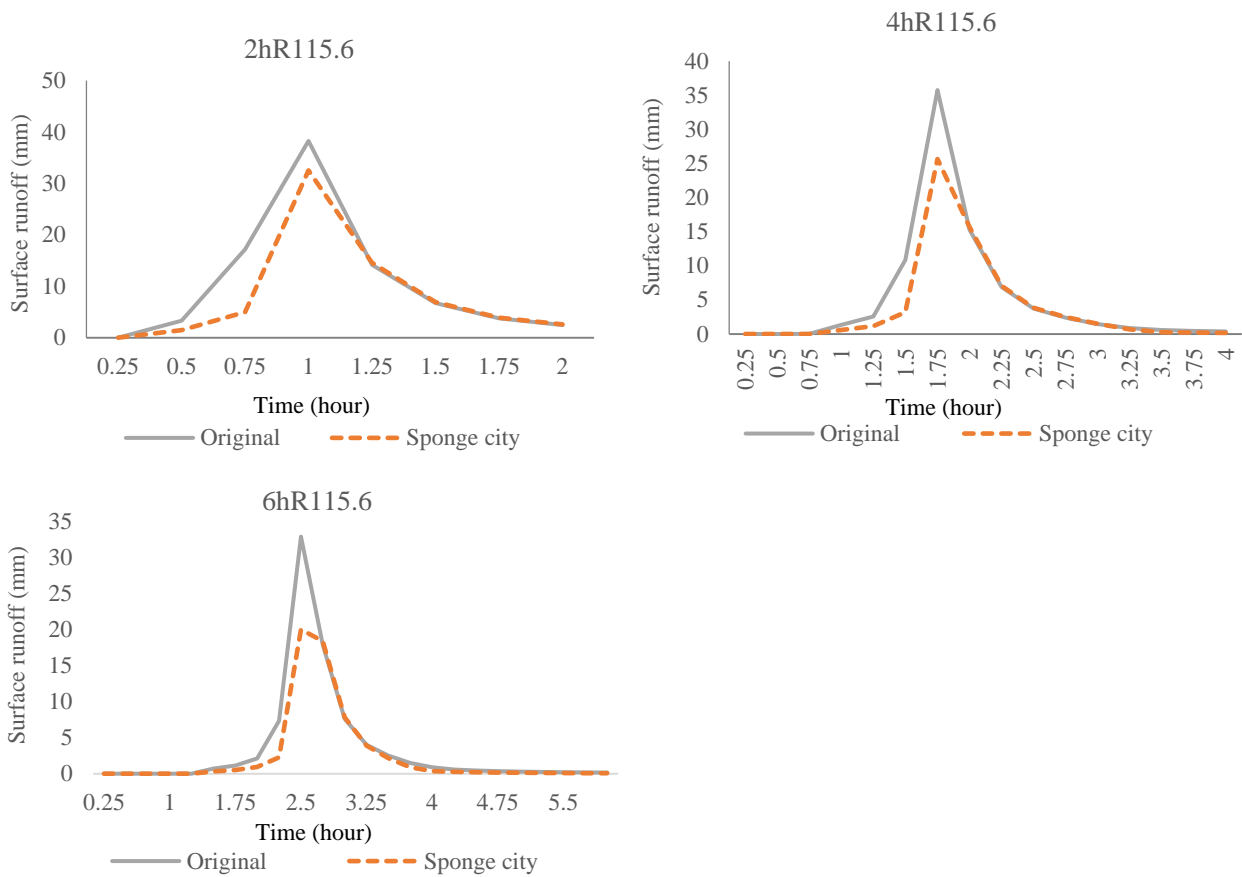


Fig. 4. Simulated surface runoff of original case and LIDs applied under the rainstorms with same rainfall amount and different duration

4. Discussion

4.1 Rainwater tank capacity

Walsh et al. (2014) suggested that the performance of rooftop rainwater harvesting dependent highly on tank storage size. Larger tank capacity has better performance in rainfall harvesting (Hu et al., 2017b). However, large tanks require lots of land space and big investment. Huang et al. (2014) found that compared with other LIDs, rainwater harvesting produced the smallest change in the peak flow, mainly because the implementation area and tank capacity were restricted in urbanized areas. Some studies have estimated sizes and performances of rainwater harvesting systems using approaches such as water balance simulation (Ghisi and Schondermark, 2013; Zhang et al., 2014) and designed rainstorm intensity (Zhang et al., 2012). In

general, storage capacity cannot be standardized, affected by site-specific variables (Campisano and Modica, 2012). In this study, a designed rainfall intensity with 2-year return period and 2-h rainfall duration was adopted. The reason is that 2hT2 rainfall storms frequently occur and it is necessary to eliminate the flood risks caused by this kind of rainfall storms. Also, rainwater tanks have a relative low vacancy rate for water storage at this size compared with higher criterion. Based on the index of rainwater utilization rate and financial costs using water balance simulation and life cycle cost analysis, Hu et al. (2012) found that the suitable rainwater tank capacity in the study area is between 26.2 and 78.5 mm. The value of designed tank capacity (44 mm) is in the range.

4.2 Clogging of permeable pavements

Kumar et al. (2016) reported that the measured in-situ infiltration rates of PP declined markedly due to clogging of pores after two years' using. Nanjing is a city suffering from high concentrations of particulate matter. The PP performance will degrade due to particle deposition on pavement surfaces. A previous study at the study area (Hu et al., 2018) has proved that clogging could reduce the performance of PP by 62-92%. However, this problem could be tackled to some extent by maintenance. Bean et al. (2007) found that maintenance significantly improved the infiltration rates of PP on 40 PP sites in Maryland, Virginia, North Carolina, and Delaware, the U.S.A. Kamali et al. (2017) found that PP could function hydraulically when they were annually cleaned. In this study, clogging was not considered during simulation. The evaluated performance of LIDs will degrade when the using period extends. However, this degradation could be slowed down with good maintenance.

4.3 Implications of low impact development technologies

Retrofitting projects in urbanized area are always restricted by limited land space, fund, resident orientation and complex urban environment. This study estimated the potential implementation level of LIDs considering land space, environment and traffics. There are maximum about 14.5% of total area (55% of roof

area) available for rainwater harvesting and 22.7% of total area available for PP. Fully using of this potential level could reduce 18.6-59.2% of surface runoff. However, flooding cannot be completely eliminated by LIDs. The reduction ratios of surface runoff and peak flow decreased with the increasing of rainfall amount. LIDs are less effective in flood mitigation during shorter and heavier storms. Despite the effectiveness of LIDs for mitigating urban flood, it is still indispensable to combine traditional grey infrastructures with LIDs for urban flood prevention. As a case study, this study identified the appropriate implementation level for the study area, which may not be applicable in other watersheds with different characteristics. Sustainable managing and using water resource has been a big challenge in the world, particularly in China (Yang et al., 2013; Yang et al., 2014). Therefore more researches are still needed for region-specific implementation of LIDs for flood control.

4.4 Limitations and future research

In line with numerous other studies, the current research has some limitations. Due to lack of observed runoff data, no effort was made to calibrate the model. Model parameter values were obtained from the published literature and the main conclusions were from multi-scenarios. Therefore, to the best of our knowledge, marked changes are unlikely caused by the uncertainties of model. Also, calibration can be done with field observed data in the future study. So the accurate evaluation of the effectiveness of LIDs can be further improved. In addition, this study discussed the designed rainfall events by Chicago hyetograph method with $r=0.4$. The storms with different patterns may have different impact on low impact development performance. Therefore, researches on various rainfall patterns are also needed in the future researches. Moreover, the investigation on implementation level of LIDs did not consider resident orientation and economic considerations, which may overestimate the potentials of the implementation level.

5. Conclusion

This study analysed the effectiveness of LIDs on flood mitigation at a feasible implementation level under

various designed storms for retrofitting an urbanized area. The main findings are summarized as follows:

- 1) LIDs are effective alternatives to mitigate urban flooding for retrofitting the study area. With the implementation of LIDs, surface runoff and peak flow decreased by 18.6-59.2% and 8-71.4% under different storms.
- 2) The flood mitigation performance decreased obviously with increasing rainfall amount. The reduction ratios of surface runoff decreased markedly from 32.7-59.2% to 18.6-20.8% with the increase of rainfall amount from a 2-year event to a 100-year event. And the reductions in peak flow declined from 11.9-12.8 mm to 3.5-8.9 mm (from 71.4-72% to 8-20.2%).
- 3) LIDs are more effective on flood mitigation as the rainfall duration increases, but it is less effective in shorter and heavier storms. Surface runoff reduction ratio increased from 22.08% to 27.63% and peak flow reduction ratio increased from 14.95% to 39.16% as the rainfall duration increases from 2 hour to 6 hour.
- 4) The study provides valuable insight for decision making regarding flood reduction capabilities of LIDs under different rainfall characteristics for retrofitting built up areas.

Acknowledgments

This work was supported by The National Key Research and Development Program of China (No. 2016YFC0401502) and the Water Conservancy Science and Technology Project of Jiangsu Province of China (No. 2015057).

Reference

- Abebe, Y., Kabir, G., & Tesfamariam, S. (2018). Assessing urban areas vulnerability to pluvial flooding using GIS applications and Bayesian Belief Network model. *Journal of Cleaner Production*, *174*, 1629-1641. doi: <https://doi.org/10.1016/j.jclepro.2017.11.066>
- Ahiablame, L., & Shakya, R. (2016). Modeling flood reduction effects of low impact development at a watershed scale. *Journal of Environmental Management*, *171*, 81-91. doi: 10.1016/j.jenvman.2016.01.036
- Ahiablame, L. M., Engel, B. A., & Chaubey, I. (2013). Effectiveness of low impact development practices in two urbanized watersheds: retrofitting with rain barrel/cistern and porous pavement. *Journal*

- of Environmental Management*, 119, 151-161. doi: 10.1016/j.jenvman.2013.01.019
- Baek, S.-S., Choi, D.-H., Jung, J.-W., Lee, H.-J., Lee, H., Yoon, K.-S., & Cho, K. H. (2015). Optimizing low impact development (LID) for stormwater runoff treatment in urban area, Korea: Experimental and modeling approach. *Water Research*, 86, 122-131. doi: <http://dx.doi.org/10.1016/j.watres.2015.08.038>
- Bean, E. Z., Hunt, W. F., & Bidelspach, D. A. (2007). Field survey of permeable pavement surface infiltration rates. *Journal of Irrigation and Drainage Engineering*, 133(3), 249-255.
- Campisano, A., & Modica, C. (2012). Optimal sizing of storage tanks for domestic rainwater harvesting in Sicily. *Resources, Conservation and Recycling*, 63, 9-16. doi: 10.1016/j.resconrec.2012.03.007
- Collins, K. A., Hunt, W. F., & Hathaway, J. M. (2008). Hydrologic comparison of four types of permeable pavement and standard asphalt in eastern North Carolina. *Journal of Hydrologic Engineering*, 13(12), 1146-1157.
- Damodaram, C., Giacomoni, M. H., Khedun, C. P., Holmes, H., Ryan, A., Saour, W., & Zechman, E. M. (2010). Simulation of Combined Best Management Practices and Low Impact Development for Sustainable Stormwater Management. *Journal of the American Water Resources Association*, 46(5), 907-918. doi: DOI 10.1111/j.1752-1688.2010.00462.x
- Du, J., Qian, L., Rui, H., Zuo, T., Zheng, D., Xu, Y., & Xu, C. Y. (2012). Assessing the effects of urbanization on annual runoff and flood events using an integrated hydrological modeling system for Qinhuai River basin, China. *Journal of Hydrology*, 464-465, 127-139. doi: 10.1016/j.jhydrol.2012.06.057
- Fassman, E. A., & Blackbourn, S. (2010). Urban runoff mitigation by a permeable pavement system over impermeable soils. *Journal of Hydrologic Engineering*, 15(6), 475-485.
- Fletcher, T. D., Shuster, W., Hunt, W. F., Ashley, R., Butler, D., Arthur, S., . . . Viklander, M. (2015). SUDS, LID, BMPs, WSUD and more – The evolution and application of terminology surrounding urban drainage. *Urban Water Journal*, 12(7), 525-542. doi: 10.1080/1573062X.2014.916314
- Gao, C. (2010). *Research on Drainage Model and Influencing Factors of Riverside City*. (Doctor), Hohai University, Nanjing (in Chinese).
- Gao, C., Liu, J., Zhu, J., & Wang, Z. W. (2013). Review of Current Research on Urban Low-impact Development Practices. *Research Journal of Chemistry and Environment*, 17, 209-214.
- Ghisi, E., & Schondermark, P. N. (2013). Investment feasibility analysis of rainwater use in residences. *Water Resources Management*, 27(7), 2555-2576.
- Hettiarachchi, S., Wasko, C., & Sharma, A. (2018). Increase in flood risk resulting from climate change in a developed urban watershed—the role of storm temporal patterns. *Hydrology and Earth System Sciences*, 22(3), 2041.
- Hood, M. J., Clausen, J. C., & Warner, G. S. (2007). Comparison of stormwater lag times for low impact and traditional residential development. *Journal of the American Water Resources Association*,

43(4), 1036-1046. doi: DOI 10.1111/j.1752-1688.2007.00085.x

- Horton, R. E. (1941). An approach toward a physical interpretation of infiltration-capacity. *Soil Science Society of America Journal*, 5(C), 399-417.
- Hu, M., Sayama, T., Duan, W., Takara, K., He, B., & Luo, P. (2017a). Assessment of hydrological extremes in the Kamo River Basin, Japan. *Hydrological Sciences Journal*, 62(8), 1255-1265. doi: 10.1080/02626667.2017.1319063
- Hu, M., Sayama, T., Zhang, X., Tanaka, K., Takara, K., & Yang, H. (2017b). Evaluation of low impact development approach for mitigating flood inundation at a watershed scale in China. *Journal of Environmental Management*, 193, 430-438. doi: <http://dx.doi.org/10.1016/j.jenvman.2017.02.020>
- Hu, M., Zhang, X., Siu, Y. L., Li, Y., Tanaka, K., Yang, H., & Xu, Y. (2018). Flood Mitigation by Permeable Pavements in Chinese Sponge City Construction. *Water*, 10(2), 172.
- Huang, J. J., Li, Y., Niu, S., & Zhou, S. H. (2014). Assessing the performances of low impact development alternatives by long-term simulation for a semi-arid area in Tianjin, northern China. *Water Science and Technology*, 70(11), 1740-1745. doi: Doi 10.2166/Wst.2014.228
- Ice, G. (2004). History of innovative best management practice development and its role in addressing water quality limited waterbodies. *Journal of Environmental Engineering*, 130(6), 684-689.
- IPCC (Intergovernmental Panel on Climate Change). (2014). *Climate Change 2013 – The Physical Science Basis: Working Group I Contribution to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change*. Cambridge: Cambridge University Press.
- Jia, H., Ma, H., Sun, Z., Yu, S., Ding, Y., & Liang, Y. (2014). A closed urban scenic river system using stormwater treated with LID-BMP technology in a revitalized historical district in China. *Ecological Engineering*, 71, 448-457.
- Kamali, M., Delkash, M., & Tajrishy, M. (2017). Evaluation of permeable pavement responses to urban surface runoff. *Journal of Environmental Management*, 187, 43-53. doi: 10.1016/j.jenvman.2016.11.027
- Kumar, K., Kozak, J., Hundal, L., Cox, A., Zhang, H., & Granato, T. (2016). In-situ infiltration performance of different permeable pavements in a employee used parking lot--A four-year study. *Journal of Environmental Management*, 167, 8-14. doi: 10.1016/j.jenvman.2015.11.019
- Lee, J.-m., Hyun, K.-h., Choi, J.-s., Yoon, Y.-j., & Geronimo, F. K. F. (2012). Flood reduction analysis on watershed of LID design demonstration district using SWMM5. *Desalination and Water Treatment*, 38(1-3), 255-261. doi: 10.1080/19443994.2012.664377
- Luan, Q., Fu, X., Song, C., Wang, H., Liu, J., & Wang, Y. (2017). Runoff Effect Evaluation of LID through SWMM in Typical Mountainous, Low-Lying Urban Areas: A Case Study in China. *Water*, 9(6), 439. doi: 10.3390/w9060439
- Mei, C., Liu, J., Wang, H., Yang, Z., Ding, X., & Shao, W. (2018). Integrated assessments of green infrastructure for flood mitigation to support robust decision-making for sponge city construction

- in an urbanized watershed. *Science of the Total Environment*, 639, 1394-1407. doi: 10.1016/j.scitotenv.2018.05.199
- MHURD. (2014). *Preliminary Technical Guidance for Sponge City Construction – Low Impact Development Rainwater System Construction*. Beijing: MHURD (in chinese).
- Mishra, S. K., & Singh, V. P. (2013). *Soil conservation service curve number (SCS-CN) methodology* (Vol. 42): Springer Science & Business Media.
- Morsy, M. M., Goodall, J. L., Shatnawi, F. M., & Meadows, M. E. (2016). Distributed Stormwater Controls for Flood Mitigation within Urbanized Watersheds: Case Study of Rocky Branch Watershed in Columbia, South Carolina. *Journal of Hydrologic Engineering*, 21(11), 05016025.
- Palanisamy, B., & Chui, T. F. M. (2015). Rehabilitation of concrete canals in urban catchments using low impact development techniques. *Journal of Hydrology*, 523, 309-319.
- Palla, A., & Gnecco, I. (2015). Hydrologic modeling of Low Impact Development systems at the urban catchment scale. *Journal of Hydrology*, 528, 361-368.
- Petit-Boix, A., Seigné-Itoiz, E., Rojas-Gutierrez, L. A., Barbassa, A. P., Josa, A., Rieradevall, J., & Gabarrell, X. (2017). Floods and consequential life cycle assessment: Integrating flood damage into the environmental assessment of stormwater Best Management Practices. *Journal of Cleaner Production*, 162, 601-608. doi: 10.1016/j.jclepro.2017.06.047
- Pickerill, J., & Maxey, L. (2009). Geographies of sustainability: low impact developments and radical spaces of innovation. *Geography Compass*, 3(4), 1515-1539.
- Pyke, C., Warren, M. P., Johnson, T., LaGro, J., Scharfenberg, J., Groth, P., . . . Main, E. (2011). Assessment of low impact development for managing stormwater with changing precipitation due to climate change. *Landscape and Urban Planning*, 103(2), 166-173. doi: DOI 10.1016/j.landurbplan.2011.07.006
- Qin, H. P., Li, Z. X., & Fu, G. T. (2013). The effects of low impact development on urban flooding under different rainfall characteristics. *Journal of Environmental Management*, 129, 577-585. doi: DOI 10.1016/j.jenvman.2013.08.026
- Rui, X., Jiang, C., & Chen, Q. (2015). Hydrological problems for engineering of drainage and water log prevention in urban areas. *Advances in Science and Technology of Water Resources*, 35(1), 42-48. (in Chinese). DOI:10. 3880/ j. issn. 1006 7647. 2015. 01. 007
- Shi, X., Li, Y., Huang, L., & Qiu, S. (2017). Waterlogging simulation and runoff analysis of urban rainstorm for Nanjing. *Science of Surveying and Mapping*, 42(9), 179-185. (in Chinese). DOI: 10.16251/j.cnki.1009-2307.2017.09.033
- Silveira, A. L. L. d. (2016). Cumulative equations for continuous time Chicago hyetograph method. *Revista Brasileira de Recursos Hídricos/Brasilian Journal of Water Resources*, 21(3), 646-651.
- Talen, E. (2011). Sprawl retrofit: sustainable urban form in unsustainable places. *Environment and*

Planning B: Planning and Design, 38(6), 952-978.

- USEPA (US Environmental Protection Agency). (2000). Low Impact Development (LID): a literature review. *Washington, DC: United States EPA Office of Water (4203)*
- Walsh, T. C., Pomeroy, C. A., & Burian, S. J. (2014). Hydrologic modeling analysis of a passive, residential rainwater harvesting program in an urbanized, semi-arid watershed. *Journal of Hydrology*, 508, 240-253. doi: DOI 10.1016/j.jhydrol.2013.10.038
- Wang, M., Zhang, D., Adhityan, A., Ng, W. J., Dong, J., & Tan, S. K. (2016). Assessing cost-effectiveness of bioretention on stormwater in response to climate change and urbanization for future scenarios. *Journal of Hydrology*, 543, 423-432. doi: 10.1016/j.jhydrol.2016.10.019
- Wang, M., Zhang, D. Q., Su, J., Dong, J. W., & Tan, S. K. (2018). Assessing hydrological effects and performance of low impact development practices based on future scenarios modeling. *Journal of Cleaner Production*, 179, 12-23. doi: 10.1016/j.jclepro.2018.01.096
- Xie, J., Wu, C., Li, H., & Chen, G. (2017). Study on Storm-Water Management of Grassed Swales and Permeable Pavement Based on SWMM. *Water*, 9(11), 840. doi: 10.3390/w9110840
- Xu, C., Hong, J., Jia, H., Liang, S., & Xu, T. (2017). Life cycle environmental and economic assessment of a LID-BMP treatment train system: A case study in China. *Journal of Cleaner Production*, 149, 227-237. doi: 10.1016/j.jclepro.2017.02.086
- Yang, H. (2014). China must continue the momentum of green law. *Nature*, 509(7502), 535.
- Yang, H., Flower, R. J., & Thompson, J. R. (2013). Sustaining China's water resources. *Science*, 339(6116), 141-141.
- Zhang, X., Guo, X., & Hu, M. (2016). Hydrological effect of typical low impact development approaches in a residential district. *Natural Hazards*, 80(1), 389-400.
- Zhang, X., Hu, M., Chen, G., & Xu, Y. (2012). Urban Rainwater Utilization and its Role in Mitigating Urban Waterlogging Problems—A Case Study in Nanjing, China. *Water Resources Management*, 26(13), 3757-3766. doi: 10.1007/s11269-012-0101-6
- Zhang, X. Q., & Hu, M. C. (2014). Effectiveness of Rainwater Harvesting in Runoff Volume Reduction in a Planned Industrial Park, China. *Water Resources Management*, 28(3), 671-682. doi: DOI 10.1007/s11269-013-0507-9